


F24 Series









General Specification	
Operating Temp.	-35°C ~ +80°C
Maximum Range	100 M
TX power supply	2 AA size Alkaline batteries
RX power supply	AC 24/48/110/220/380 VDC 24 V
Protection class	IP 65 Industrial standard
ID Code	4.3 billion (32 bit)
Hamming code distance	<u>></u> 4
TX Dimension & Weight	186 x 61 x 51 mm Apprx. 255g (w/o batteries)
RX Dimension & Weight	200x162x107mm Apprx.1220g (w/o cable
Operating frequency	433.05~434.79
Transmitting power	Less than10 mW


Durable nylon-fiber housing for extra shock resistance..

- Low power consumption with 2 AA batteries (last up to 2 months in normal operation)
- Operating range up to 100 meters
- Programmable function setting through Windows-based software.
- Economic efficiency, ease of operation.
- Pre-wiring standard cable making wiring procedures easier.
- 100% compatible components reducing stock of spare part.

Safety features:

- ${}_{\precsim}$ 4.3 billion unique ID code
- $rac{1}{3}$ Hamming code
- \gtrsim enhanced watch-dog circuit



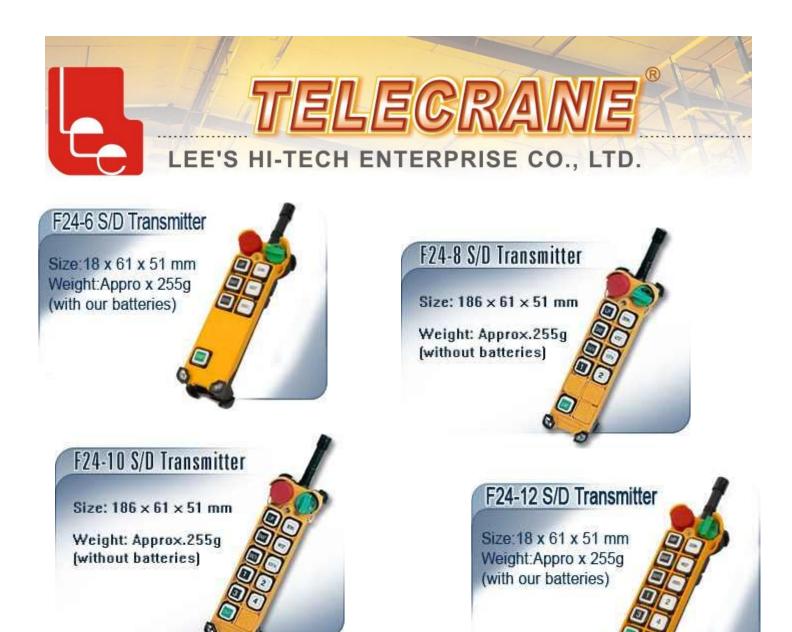







Accessories

Series F-24 Series Software CD ROM & USB Interface Cable

F-24 Series Copier (Synchronize utility tool)

External Passive Antenna Set Transmitter Protective Cover

















